



Description

GC-Track Fire Monitoring System has a panel with 12 standard inputs for the connection of fire pump controllers, a temperature transducer and a pressure sensor, it is also capable of recording the activity of the water tank trough an ultrasonic sensor (available on request).

The system has its own GC-Track application that displays and alerts users to any event.


General Specifications

Supply voltage:	110-120VAC
Frequency range:	50Hz-60Hz
Output protection:	Short circuit, overvoltage-current
Standard input connection type	Standard relays (Dry contacts)
Operating Temperature	4 ° C (39 ° F) to + 50 ° C (122 ° F)
Enclosure	NEMA 2
Battery backup duration	Over 24 hours

Communication

- GPRS GSM 3G/4G
- B2/B4/B5 bands
- Ethernet

Dimensions

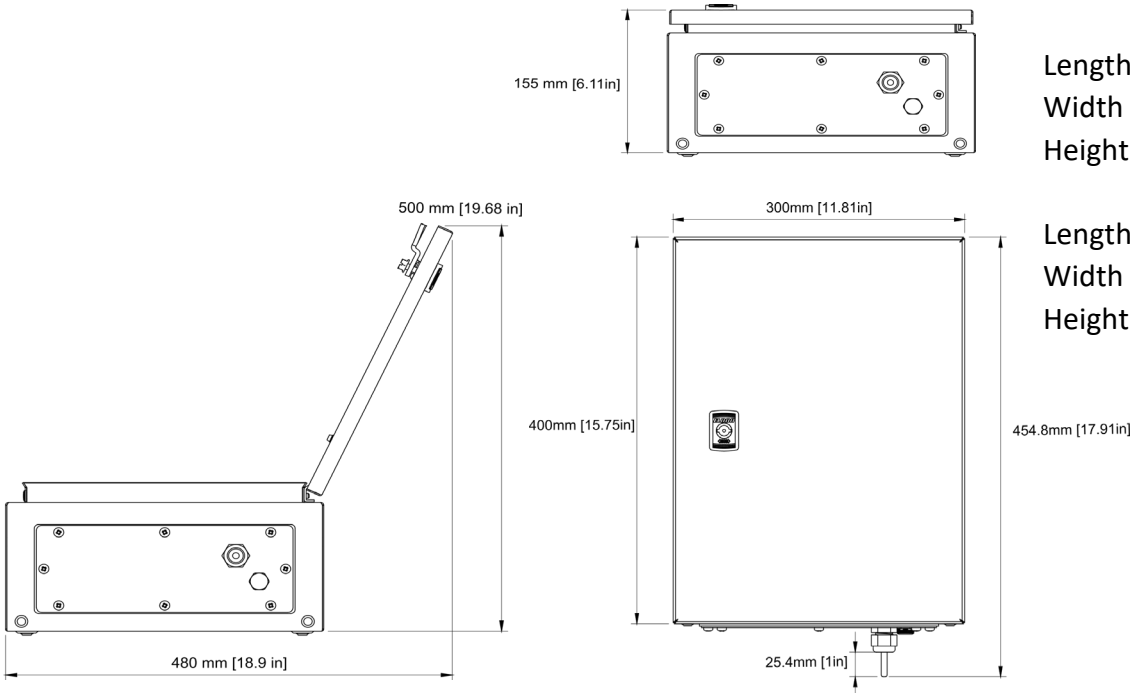

	Closed door
Length	11.81 in / 30 cm
Width	6.11 in / 15.5 cm
Height	17.91 in / 45.8 cm
	Open door
Length	18.9 in / 48 cm
Width	19.68 in / 50 cm
Height	17.91 in / 45.8 cm



LISTED
ADDITIVE PUMP
CONTROLLER
EX27962



GC-Track Redbox is compatible with the following transducers

	Pressure transducer:	Water level transducer:
Supply voltage	12 Vdc	5 Vdc
Communication	1-wire	Pulse width (150 us - 25ms)
Range	0 PSI (0V) to 300PSI (5V)	25 cm to 400 cm

Contact

For more information, please contact us at:

Information: contact@gc-track.com

Technical support: support@gc-track.com

Tel .+52 686 841 3086

You may also find us at



gc-track.com